

EDF-schedulability of synchronous periodic task systems is coNP-hard

Friedrich Eisenbrand Thomas Rothvoß

*Institute of Mathematics
EPFL, Lausanne, Switzerland
{friedrich.eisenbrand,thomas.rothvoss}@epfl.ch*

Abstract

In the *synchronous periodic task model*, a set τ_1, \dots, τ_n of tasks is given, each releasing jobs of running time c_i with relative deadline d_i , at each integer multiple of the period p_i . It is a classical result that *Earliest Deadline First (EDF)* is an optimal preemptive uni-processor scheduling policy. For constrained deadlines, i.e. $d_i \leq p_i$, the EDF-schedule is feasible if and only if

$$\forall Q \geq 0 : \sum_{i=1}^n \left(\left\lfloor \frac{Q - d_i}{p_i} \right\rfloor + 1 \right) \cdot c_i \leq Q.$$

Though an enormous amount of literature deals with this topic, the complexity status of this test has remained unknown. We prove that testing EDF-schedulability of such a task system is (weakly) **coNP**-hard. This solves Problem 2 from the survey “Open Problems in Real-time Scheduling” by Baruah & Pruhs. The hardness result is achieved by applying recent results on inapproximability of Diophantine approximation.

1 Introduction

Nowadays more and more devices are controlled by embedded microprocessors, for example in power plants, car electronics, flight control systems, robotics and telecommunication systems, see Buttazzo [8] for an extensive introduction. Since many applications are safety critical, each task running on such a processor must produce the output not only correctly but also on time. Several tasks may run on the same processor and a *Real-time scheduling policy* decides which task should be active in which intervals, to guarantee that all deadlines are kept.

In the simple, but important *periodic task model* a set τ_1, \dots, τ_n of tasks is given, where each τ_i is an infinite sequence of jobs, defined by an *execution time* $c_i \in \mathbb{Q}_+$, a (relative) *deadline* $d_i \in \mathbb{Q}_+$ and a *period* $p_i \in \mathbb{Q}_+$. We assume that the tasks are *synchronous*, i.e. there is a time, say 0, at which all tasks release a job simultaneously. In other words for each $i \in \{1, \dots, n\}$

and $z \in \mathbb{Z}_{\geq 0}$, a job of running time c_i and absolute deadline $z \cdot p_i + d_i$ is released at $z \cdot p_i$. Furthermore we assume *constrained-deadlines*, hence $d_i \leq p_i$ for each $i \in \{1, \dots, n\}$.

We consider *preemptive* uni-processor schedules, i.e. at any time a running job may be preempted and resumed later. As the name suggests, in the *Earliest Deadline First (EDF)* policy, at any time that job from the queue of released and not yet accomplished jobs is active, whose (absolute) deadline comes next. The EDF-schedule is provably optimal in this setting, meaning that if there is a schedule in which all jobs meet their deadlines, then the EDF-schedule is feasible as well (see Dertouzos [11]).

The main question of feasibility analysis however remains: Will each of the infinitely many jobs be finished in time? First observe, that

$$\left\lfloor \frac{Q - d_i}{p_i} \right\rfloor + 1$$

is the number of jobs of τ_i that have both, their release time and deadline in the interval $[0, Q]$. Consequently the quantity

$$\text{DBF}(\tau_i, Q) = \left(\left\lfloor \frac{Q - d_i}{p_i} \right\rfloor + 1 \right) \cdot c_i$$

is the amount of running time that, regardless of the used scheduling policy, has to be spent on τ_i in this interval. More general, the *demand bound function*

$$\text{DBF}(\mathcal{S}, Q) = \sum_{i=1}^n \left(\left\lfloor \frac{Q - d_i}{p_i} \right\rfloor + 1 \right) \cdot c_i$$

gives the running time of *all* jobs, which have their release time and deadline in the interval $[0, Q]$. As a consequence, for feasibility it is necessary, that $\text{DBF}(\mathcal{S}, Q) \leq Q$ for all $Q \geq 0$. Baruah et al. [5] showed that this condition is in fact sufficient, hence an *EDF-schedulability test* is a test which checks validity of the following for-

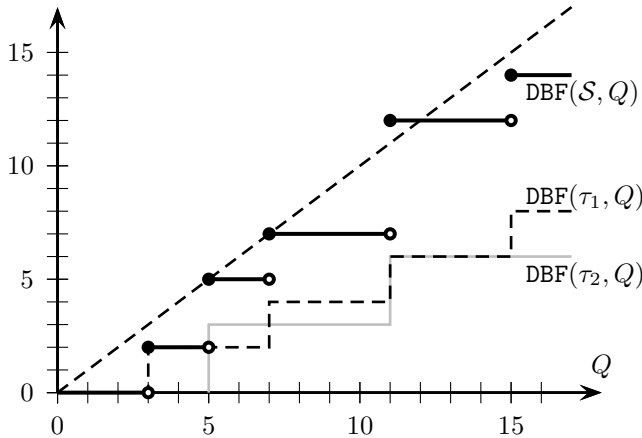


Figure 1: Constrained deadline task system $\mathcal{S} = \{\tau_1, \tau_2\}$ with $\tau_1 = (2, 3, 4)$, $\tau_2 = (3, 5, 6)$, using notation $\tau_i = (c_i, d_i, p_i)$. One has $\text{DBF}(\mathcal{S}, Q) > Q$ for $Q = 11$, thus \mathcal{S} is not EDF-schedulable.

mula

$$\forall Q \geq 0 : \sum_{i=1}^n \left(\left\lfloor \frac{Q - d_i}{p_i} \right\rfloor + 1 \right) \cdot c_i \leq Q,$$

see Figure 1 for an illustration.

Much effort has been spent on developing sufficient polynomial or exact pseudo-polynomial time tests for EDF-schedulability of periodic tasks, see [2, 3, 5, 9, 12]. But none of the algorithms suggested in these papers was able to decide EDF-schedulability on a unit speed processor correctly and in polynomial time for all instances. The question whether EDF-schedulability can be decided in polynomial time is stated as a major open problem in the survey of Baruah & Pruhs [6] on open problems in Real-time scheduling. We settle the complexity status of testing EDF-schedulability by proving the following theorem.

THEOREM 1.1. *Given a set $\mathcal{S} = \{\tau_1, \dots, \tau_n\}$ of synchronous, periodic, constrained-deadline tasks defined by rational numbers $0 \leq c_i \leq d_i \leq p_i$, it is (weakly) **coNP**-hard to decide, whether \mathcal{S} is EDF-schedulable, i.e. testing the condition*

$$\forall Q \geq 0 : \sum_{i=1}^n \left(\left\lfloor \frac{Q - d_i}{p_i} \right\rfloor + 1 \right) \cdot c_i \leq Q,$$

*is (weakly) **coNP**-hard. This holds even if $d_i = p_i$ for $i = 1, \dots, n - 1$.*

This, together with the result in [5] implies the following corollary.

COROLLARY 1.1. *Given a set $\mathcal{S} = \{\tau_1, \dots, \tau_n\}$ of sporadic tasks with worst-case execution time c_i , relative*

*deadline d_i and minimum inter-arrival time p_i it is (weakly) **coNP**-hard to determine, whether the EDF-schedule of \mathcal{S} is feasible.*

Related work. One approach to obtain algorithms to test EDF-feasibility lies in bounding the interval, in which the demand bound function has to be evaluated. Let $u = \sum_{i=1}^n \frac{c_i}{p_i}$ be the utilization of a task system. Given that \mathcal{S} is not EDF-schedulable, the smallest $Q > 0$, certifying the infeasibility must have

$$Q < \frac{u}{1 - u} \max_{i=1, \dots, n} \{p_i - d_i\},$$

see e.g. [4, 17]. This admits a pseudo-polynomial time algorithm for the feasibility test, if the utilization of \mathcal{S} is bounded by $1 - \varepsilon$ for some constant $\varepsilon > 0$.

Albers & Slomka [1] gave an FPTAS for approximating the speed of a processor, needed to make the EDF-schedule of \mathcal{S} feasible. Their algorithm is also interpreted as follows. It either asserts that the tasks are feasible, or it asserts that the tasks are infeasible on a processor of speed $1 - \varepsilon$. A similar result was also provided in the setting of fixed priority scheduling [15]. See [8] for more details on fixed priority scheduling policies and [9, 2, 12, 21] for further approaches to feasibility analyzes of EDF-schedules. Recently, Bonifaci et al. [7] extended the result of Albers & Slomka to the case of multiprocessor scheduling with migration. The algorithm asserts that a set of tasks is feasible on m speed- $(2 - 1/m + \varepsilon)$ machines or infeasible on m speed-1 machines.

In a popular special case, the tasks have *implicit-deadlines*, i.e. $d_i = p_i$ for all i . In that case the condition $\text{DBF}(\mathcal{S}, Q) \leq Q$ has only to be evaluated at $Q = \text{scm}(p_1, \dots, p_n)$ and the set is EDF-schedulable if and only if the utilization is bounded by 1, see Liu & Layland [19]. In other words, the EDF-schedulability in this special case is decidable in polynomial time. If the tasks may be asynchronous, i.e. each task has an offset a_i , such that jobs are released at $z \cdot p_i + a_i$, then testing the feasibility is strongly **coNP**-hard [18]. This even holds if the utilization of the system is bounded from above by an arbitrarily small constant.

In the *sporadic* task model neither release times nor running times are predetermined. There, c_i denotes the *worst-case execution time* and p_i denotes the *minimum inter-arrival time*. But the worst-case is attained in a *synchronous arrival sequence*, that is when all tasks release jobs at time 0, all jobs fully use the worst-case execution time c_i and jobs arrive as early as permissible, see Baruah, Mok & Rosier [5]. In other words, the sporadic task system is EDF-schedulable if and only if this is true for the corresponding synchronous periodic task system.

2 Diophantine approximation

The EDF-schedulability test contains only one single unknown variable Q . This is unusual for **NP/coNP**-hard problems and helps us to narrow down the search for **NP/coNP**-hard remote relatives. The relative that we found helpful for problems in Real-time scheduling is *Diophantine approximation*, a problem in the field of algorithmic number theory (see e.g. [20]). Roughly speaking, there the objective is to replace a number or a vector, by another number or vector which is very close to the original, but less complex in terms of fractionality.

More precisely, a sequence $\alpha_1, \dots, \alpha_n$ of rational numbers together with a bound $N \in \mathbb{N}$ and an error bound $\varepsilon \in \mathbb{Q}_+$ is given. One has to decide whether

$$(2.1) \quad \exists Q \in \{1, \dots, N\} : \max_{i=1, \dots, n} | \lfloor Q\alpha_i \rfloor - Q\alpha_i | \leq \varepsilon,$$

where $\lfloor x \rfloor$ is the integer closest to $x \in \mathbb{R}$. In a seminal work, Lagarias [16] has shown, that testing (2.1) is **NP**-hard. This was later extended by Rössner & Seifert [22] and Chen & Meng [10] to inapproximability results. In [13], the authors of this paper applied these results to show that response-time computation of tasks in a *Rate-monotonic schedule* is **NP**-hard (under Turing reductions), where tasks with smaller period always preempt that of larger period.

The EDF-schedulability test uses a rounding operation, where one replaces a rational by the closest integer which is equal or smaller, i.e. one *rounds down*. In Diophantine approximation, one rounds up or down to the nearest integer. The variant of Diophantine approximation, where one has to round up is called *directed Diophantine approximation (DDA)*. Recently the authors of this paper provided the following hardness result for directed Diophantine approximation.

THEOREM 2.1. (HARDNESS OF DDA_ρ [14]) *There is a constant $c > 0$, such that the following Directed Diophantine Approximation problem (DDA_ρ) with gap parameter $\rho = \lfloor n^{c/\log \log n} \rfloor$ is **NP**-hard: Given numbers $\alpha_1, \dots, \alpha_n \in \mathbb{Q}$, a bound $N \in \mathbb{N}$ and an error bound $\varepsilon \in \mathbb{Q}_+$ as input, distinguish the following cases*

- YES : $\exists Q \in \{ \lceil N/2 \rceil, \dots, N \} :$
 $\max_{i=1, \dots, n} (\lceil Q\alpha_i \rceil - Q\alpha_i) \leq \varepsilon$
- NO : $\nexists Q \in \{ 1, \dots, \rho \cdot N \} :$
 $\max_{i=1, \dots, n} (\lceil Q\alpha_i \rceil - Q\alpha_i) \leq 2^n \cdot \varepsilon$

Note that the union of the YES and NO cases does not represent all possible inputs. But there is a polynomial time reduction, taking the input of an **NP**-complete problem, say a SAT clause C , and yielding a DDA_ρ instance respecting the YES-case if C is satisfiable and

the NO-case otherwise. See, e.g., [23, 24] for more details on gap reductions.

Despite of some similarities between DDA_ρ and EDF-schedulability, we still observe crucial differences:

1. DDA_ρ contains a ceiling instead of a floor operation.
2. The number Q is restricted to be integer.
3. The approximation error is measured with $\| \cdot \|_\infty$ -norm instead of $\| \cdot \|_1$ -norm.
4. For DDA_ρ , one has a bound N on the number Q .

We can easily eliminate the first difference by observing that $\lceil Q\alpha_i \rceil - Q\alpha_i = Q \cdot (-\alpha_i) - \lfloor Q(-\alpha_i) \rfloor$. Consequently replacing the numbers by their negatives, we obtain a DDA_ρ problem with a floor operation. By adding a sufficiently large integer z and using $Q(\alpha_i + z) - \lfloor Q(\alpha_i + z) \rfloor = Q\alpha_i - \lfloor Q\alpha_i \rfloor$ for $Q \in \mathbb{N}$ we may then make the α_i 's positive. We conclude that given $\alpha_1, \dots, \alpha_n \in \mathbb{Q}_+$, $N \in \mathbb{N}$ and $\varepsilon \in \mathbb{Q}_+$, it is **NP**-hard to distinguish

- YES : $\exists Q \in \{ \lceil N/2 \rceil, \dots, N \} :$
 $\max_{i=1, \dots, n} (Q\alpha_i - \lfloor Q\alpha_i \rfloor) \leq \varepsilon$
- NO : $\nexists Q \in \{ 1, \dots, \rho \cdot N \} :$
 $\max_{i=1, \dots, n} (Q\alpha_i - \lfloor Q\alpha_i \rfloor) \leq 2^n \cdot \varepsilon$

for $\rho = \lfloor n^{c/\log \log n} \rfloor$. In a next step, we introduce a variant of directed Diophantine approximation which incorporates differences (2) & (3). We use the notation $[\alpha, \beta]$ to denote the set of real numbers $[\alpha, \beta] = \{ x \in \mathbb{R} : \alpha \leq x \leq \beta \}$.

THEOREM 2.2. (HARDNESS OF DDA_ρ^*) *There exists a constant $c > 0$, such that the following DDA_ρ^* problem with gap parameter $\rho = \lfloor n^{c/\log \log n} \rfloor$ is **NP**-hard: Given numbers $\alpha_1, \dots, \alpha_n \in \mathbb{Q}_+$, weights $w_1, \dots, w_n \in \mathbb{Q}_+$, a bound $N \in \mathbb{N}$ and an error bound $\varepsilon \in \mathbb{Q}_+$, distinguish*

- YES : $\exists Q \in [\lceil N/2 \rceil, N] : \sum_{i=0}^n w_i (Q\alpha_i - \lfloor Q\alpha_i \rfloor) \leq \varepsilon$
- NO : $\nexists Q \in [1, \rho \cdot N] : \sum_{i=0}^n w_i (Q\alpha_i - \lfloor Q\alpha_i \rfloor) \leq \rho \cdot \varepsilon$

Proof. We reduce DDA_ρ to DDA_ρ^* . For this purpose let $(\alpha_1, \dots, \alpha_n; N; \varepsilon)$ be the given DDA_ρ instance (with rounding down and $\alpha_i > 0$ for all i). Since the α_i 's are rational numbers, we can write them as $\alpha_i = \frac{a_i}{b_i}$ with pairwise co-prime integers $a_i, b_i \in \mathbb{N}$. Our DDA_ρ^* instance consists of the same numbers $\alpha_1, \dots, \alpha_n$, equipped with unit weights $w_1 = \dots = w_n = 1$. Furthermore we choose the same bound N , but a different error bound $\varepsilon' = n \cdot \varepsilon$ and we add one more number $\alpha_0 = 1$ with a very high weight of $w_0 = 2 \cdot \max\{a_i : i = 1, \dots, n\} \cdot \varepsilon \cdot \rho \cdot n$. Intuitively

the weight w_0 is large enough, such that any reasonable DDA_ρ^* solution Q of this instance must be an integer. It suffices to show the following implications:

- YES :
 $\exists Q \in \{[N/2], \dots, N\} : \max_{i=1, \dots, n} (Q\alpha_i - \lfloor Q\alpha_i \rfloor) \leq \varepsilon$
 $\Rightarrow \exists Q \in [[N/2], N] : \sum_{i=0}^n w_i(Q\alpha_i - \lfloor Q\alpha_i \rfloor) \leq \varepsilon'$
- NO :
 $\nexists Q \in \{1, \dots, \rho \cdot N\} : \max_{i=1, \dots, n} (Q\alpha_i - \lfloor Q\alpha_i \rfloor) \leq 2^n \cdot \varepsilon$
 $\Rightarrow \nexists Q \in [1, \rho \cdot N] : \sum_{i=0}^n w_i(Q\alpha_i - \lfloor Q\alpha_i \rfloor) \leq \rho \cdot \varepsilon'$

YES-case: Clearly YES instances for DDA_ρ^* are mapped to YES instances of DDA_ρ^* by simply using the same solution Q . This is the case since given a $Q \in \{[N/2], \dots, N\}$ that matches the conditions of the YES case for DDA_ρ , one has

$$\begin{aligned} & \sum_{i=0}^n w_i(Q\alpha_i - \lfloor Q\alpha_i \rfloor) \\ = & w_0 \cdot \underbrace{(Q - \lfloor Q \rfloor)}_{=0} + \sum_{i=1}^n 1 \cdot \underbrace{(Q\alpha_i - \lfloor Q\alpha_i \rfloor)}_{\leq \varepsilon} \\ \leq & n \cdot \varepsilon \\ = & \varepsilon'. \end{aligned}$$

NO-case: Now suppose that we have a $Q \in [1, \rho \cdot N]$ with $\sum_{i=0}^n w_i(Q\alpha_i - \lfloor Q\alpha_i \rfloor) \leq \rho \cdot \varepsilon' = \rho \cdot n \cdot \varepsilon$. Decrease Q continuously until $Q\alpha_j \in \mathbb{Z}$ for at least one $j \in \{0, \dots, n\}$. This can only decrease the approximation error since $\lfloor Q\alpha_i \rfloor$ remains invariant for all $i \in \{0, \dots, n\}$. Furthermore Q will never be decreased below 1 since $\alpha_0 = 1$. If Q is then an integer, we are done since

$$\begin{aligned} \max_{i=1, \dots, n} (Q\alpha_i - \lfloor Q\alpha_i \rfloor) & \leq \sum_{i=0}^n w_i(Q\alpha_i - \lfloor Q\alpha_i \rfloor) \\ & \leq \rho \cdot n \cdot \varepsilon \\ & \leq 2^n \varepsilon \end{aligned}$$

for n large enough. Now suppose that Q is not integer. Then we may write $Q\alpha_j = Q \frac{a_j}{b_j} =: z \in \mathbb{Z}$ for some $j \in \{1, \dots, n\}$, thus $Q = \frac{zb_j}{a_j} \in \mathbb{Z} \frac{1}{a_j}$. We write $Q = \frac{y}{a_j}$ where y is integer but not a multiple of a_j (since $Q \notin \mathbb{Z}$). Hence

$$Q - \lfloor Q \rfloor = \frac{y}{a_j} - \frac{\lfloor Q \rfloor a_j}{a_j} = \underbrace{(y - \lfloor Q \rfloor a_j)}_{\geq 1} \cdot \frac{1}{a_j} \geq \frac{1}{a_j}$$

where we use that $y - \lfloor Q \rfloor a_j$ is a non-negative integer but $y - \lfloor Q \rfloor a_j \neq 0$. We obtain

$$\sum_{i=0}^n w_i(Q\alpha_i - \lfloor Q\alpha_i \rfloor) \geq w_0 \cdot (Q - \lfloor Q \rfloor) \geq w_0 \cdot \frac{1}{a_j} > \rho \cdot n \cdot \varepsilon$$

by the choice of w_0 . This contradiction yields that $Q \in \mathbb{N}$ and the claim follows.

3 Hardness of EDF-schedulability

In this section we will see that the NP-hard problem DDA_ρ^* is close enough to the EDF-schedulability condition to admit a direct reduction. To achieve this, YES (NO, resp.) instances for DDA_ρ^* are mapped to NO (YES, resp.) instances of EDF-schedulability. Intuitively this is done as follows: Suppose we are given a DDA_ρ^* instance $(\alpha_1, \dots, \alpha_n; w_1, \dots, w_n; N; \varepsilon)$. The first idea is to create implicit-deadline tasks τ_1, \dots, τ_n with $p_i = d_i = \frac{1}{\alpha_i}$. Then we have

$$\left\lfloor \frac{Q - d_i}{p_i} \right\rfloor + 1 = \lfloor Q\alpha_i \rfloor$$

hence a Q that maximizes $\text{DBF}(\mathcal{S}, Q)/Q$, minimizes the approximation error. On the other hand we need to forbid Q with $Q \gg N$. For this purpose we add a special task τ_0 which has a deadline of $N/2$ and a sufficiently large period (we may imagine $p_0 = \infty$). Then the quantity $\text{DBF}(\tau_0, Q)/Q$ contributes significantly to $\text{DBF}(\mathcal{S}, Q)/Q$ only if Q is of order N .

THEOREM 3.1. *Given an instance of DDA_ρ^* consisting of rational numbers $\alpha_1, \dots, \alpha_n \in \mathbb{Q}_+$, weights $w_1, \dots, w_n \in \mathbb{Q}_+$, a bound $N \in \mathbb{N}_{\geq 2}$ and an error bound $\varepsilon > 0$, we can find in polynomial time a constrained-deadline task system \mathcal{S} consisting of $n + 1$ tasks such that*

- YES: $\exists Q \in [[N/2], N] : \sum_{i=1}^n w_i(Q\alpha_i - \lfloor Q\alpha_i \rfloor) \leq \varepsilon \Rightarrow \mathcal{S}$ not EDF-schedulable
- NO: $\nexists Q \in [[N/2], 3N] : \sum_{i=1}^n w_i(Q\alpha_i - \lfloor Q\alpha_i \rfloor) \leq 3\varepsilon \Rightarrow \mathcal{S}$ EDF-schedulable

Furthermore n tasks in \mathcal{S} have implicit-deadlines.

Proof. A set of tasks is EDF-schedulable on a processor of speed $\beta > 0$ if and only if the tasks with running times scaled by $\frac{1}{\beta}$ are feasible on a unit speed processor. Thus we may assume to have an oracle for the test

$$\forall Q \geq 0 : \sum_{i=1}^n \left(\left\lfloor \frac{Q - d_i}{p_i} \right\rfloor + 1 \right) \cdot c_i \leq \beta \cdot Q$$

Let $N \in \mathbb{N}, \alpha_1, \dots, \alpha_n, w_1, \dots, w_n \in \mathbb{Q}_+, \varepsilon > 0$ be the DDA_ρ^* instance. We choose a constrained-deadline task system \mathcal{S} consisting of $n + 1$ tasks

$$\begin{aligned} \tau_i & = (c_i, d_i, p_i) = \left(w_i, \frac{1}{\alpha_i}, \frac{1}{\alpha_i} \right) \quad \forall i = 1, \dots, n \\ \tau_0 & = (c_0, d_0, p_0) = (3\varepsilon, [N/2], 12N) \end{aligned}$$

and processor speed

$$\beta = \frac{\varepsilon}{N} + \sum_{i=1}^n w_i \alpha_i$$

which just slightly exceeds the utilization.

YES-case: Suppose that we have a $Q \in \lceil N/2 \rceil, N$ with $\sum_{i=1}^n w_i(Q\alpha_i - \lfloor Q\alpha_i \rfloor) \leq \varepsilon$. Then

$$\begin{aligned} & \text{DBF}(\{\tau_0, \dots, \tau_n\}, Q) \\ = & \text{DBF}(\tau_0, Q) + \sum_{i=1}^n \left(\left\lfloor \frac{Q - d_i}{p_i} \right\rfloor + 1 \right) c_i \\ = & 3\varepsilon + \sum_{i=1}^n \lfloor Q\alpha_i \rfloor w_i \\ \stackrel{(*)}{\geq} & 3\varepsilon + \left(\left(\sum_{i=1}^n Q\alpha_i w_i \right) - \varepsilon \right) \\ = & 2\varepsilon + Q \sum_{i=1}^n \alpha_i w_i \\ \stackrel{(**)}{>} & Q \cdot \underbrace{\left(\frac{\varepsilon}{N} + \sum_{i=1}^n \alpha_i w_i \right)}_{=\beta} \\ = & \beta Q \end{aligned}$$

Here we use $\sum_{i=1}^n w_i(Q\alpha_i - \lfloor Q\alpha_i \rfloor) \leq \varepsilon$ in (*) and $Q \leq N < 2N$ in (**). Thus the task system \mathcal{S} is not EDF-schedulable (on a processor of speed β).

NO-case: Next we assume that \mathcal{S} is not EDF-schedulable. Then there exists a $Q > 0$ such that $\text{DBF}(\{\tau_0, \dots, \tau_n\}, Q) > \beta Q$. We need to show that $Q \in \lceil N/2 \rceil, 3N$ and $\sum_{i=1}^n w_i(Q\alpha_i - \lfloor Q\alpha_i \rfloor) \leq 3\varepsilon$.

Observe that using the definition of β and $\lfloor Q\alpha_i \rfloor \leq Q\alpha_i$, one has

$$\begin{aligned} \text{DBF}(\tau_0, Q) &= \text{DBF}(\mathcal{S}, Q) - \text{DBF}(\{\tau_1, \dots, \tau_n\}, Q) \\ &> \beta Q - \sum_{i=1}^n \lfloor Q\alpha_i \rfloor w_i \\ &\geq \beta Q - Q \sum_{i=1}^n \alpha_i w_i \\ &= \beta Q - Q \underbrace{\left(\frac{\varepsilon}{N} + \sum_{i=1}^n \alpha_i w_i \right)}_{=\beta} + Q \frac{\varepsilon}{N} \\ &= Q \frac{\varepsilon}{N} \end{aligned}$$

Since τ_0 has its first deadline at $d_0 = \lceil N/2 \rceil$ and $\text{DBF}(\tau_0, Q) > 0$ we must have $Q \geq \lceil N/2 \rceil$. Suppose

for contradiction that already the second deadline of τ_0 occurred before Q , i.e. $Q \geq p_0 = 12N$. Then

$$\text{DBF}(\tau_0, Q) \leq c_0 \cdot \left\lceil \frac{Q}{p_0} \right\rceil \leq 2 \cdot 3\varepsilon \cdot \frac{Q}{12N} < Q \frac{\varepsilon}{N},$$

leading to a contradiction. Hence, till time Q exactly one deadline of τ_0 has passed, thus $\text{DBF}(\tau_0, Q) = 3\varepsilon$. But we already inferred the bound $\text{DBF}(\tau_0, Q) > Q \frac{\varepsilon}{N}$, thus even $Q < 3N$. Finally

$$\begin{aligned} & \sum_{i=1}^n w_i(Q\alpha_i - \lfloor Q\alpha_i \rfloor) \\ = & Q \underbrace{\sum_{i=1}^n \alpha_i w_i}_{<\beta} - (\text{DBF}(\mathcal{S}, Q) - \text{DBF}(\tau_0, Q)) \\ \leq & \underbrace{Q\beta - \text{DBF}(\mathcal{S}, Q)}_{<0} + 3\varepsilon \\ \leq & 3\varepsilon \end{aligned}$$

and the claim follows.

Theorem 1.1 follows by combining Theorem 2.2 and 3.1, with $\rho = 4$.

4 Open problems

We obtained that testing EDF-schedulability of synchronous periodic tasks is **coNP**-hard. Nevertheless the starting point of the reduction is a problem that admits pseudo-polynomial time algorithms. Furthermore the utilization of the task system constructed in the reduction might be extremely close to 1. Hence we believe that the following statements are true:

CONJECTURE 1. *There is a pseudo-polynomial time algorithm for testing EDF-schedulability of synchronous constrained-deadline systems.*

Note that till now such an algorithm is only known if $1/(1-u)$ is bounded by a polynomial in the input length (again $u := \sum_{i=1}^n \frac{c_i}{p_i}$).

CONJECTURE 2. *For every fixed $\varepsilon > 0$, EDF-schedulability of a synchronous constrained-deadline task system τ_1, \dots, τ_n can be decided in polynomial time if $u \leq 1 - \varepsilon$.*

References

- [1] K. ALBERS AND F. SLOMKA, *An event stream driven approximation for the analysis of real-time systems*, in ECRTS, IEEE Computer Society, 2004, pp. 187–195.

- [2] ———, *Efficient feasibility analysis for real-time systems with EDF scheduling*, in DATE, IEEE Computer Society, 2005, pp. 492–497.
- [3] S. K. BARUAH, D. CHEN, S. GORINSKY, AND A. K. MOK, *Generalized multiframe tasks*, Real-Time Systems, 17 (1999), pp. 5–22.
- [4] S. K. BARUAH AND J. GOOSSENS, *Scheduling real-time tasks: Algorithms and complexity*, in Handbook of Scheduling — Algorithms, Models, and Performance Analysis, J. Y.-T. Leung, ed., Chapman & Hall/CRC, 2004, ch. 28.
- [5] S. K. BARUAH, A. K. MOK, AND L. E. ROSIER, *Preemptively scheduling hard-real-time sporadic tasks on one processor*, in IEEE Real-Time Systems Symposium, 1990, pp. 182–190.
- [6] S. K. BARUAH AND K. PRUHS, *Open problems in real-time scheduling*, To appear in: Journal of Scheduling, (2009).
- [7] V. BONIFACI, A. MARCHETTI-SPACCAMELA, AND S. STILLER, *A constant-approximate feasibility test for multiprocessor real-time scheduling*, in ESA, D. Halperin and K. Mehlhorn, eds., vol. 5193 of Lecture Notes in Computer Science, Springer, 2008, pp. 210–221.
- [8] G. BUTTAZZO, *Hard Real-Time Computing Systems: Predictable Scheduling Algorithms and Applications*, Kluwer Academic Publishers, Boston, USA, 2000.
- [9] S. CHAKRABORTY, S. KÜNZLI, AND L. THIELE, *Approximate schedulability analysis*, in IEEE Real-Time Systems Symposium, 2002, pp. 159–168.
- [10] W. CHEN AND J. MENG, *An improved lower bound for approximating shortest integer relation in l_∞ norm (SIR_∞)*, Information Processing Letters, 101 (2007), pp. 174–179.
- [11] M. L. DERTOUZOS, *Control robotics: The procedural control of physical processes*, in IFIP Congress, 1974, pp. 807–813.
- [12] U. C. DEVI, *An improved schedulability test for uniprocessor periodic task systems*, in ECRTS, IEEE Computer Society, 2003, p. 23.
- [13] F. EISENBRAND AND T. ROTHVOSS, *Static-priority Real-time Scheduling: Response Time Computation is NP-hard*, in IEEE Real-Time Systems Symposium (RTSS), 2008.
- [14] F. EISENBRAND AND T. ROTHVOSS, *New hardness results for diophantine approximation*, in 12-th International Workshop on Approximation Algorithms for Combinatorial Optimization Problems (APPROX 2009), LNCS, Springer, 2009.
- [15] N. FISHER AND S. K. BARUAH, *A fully polynomial-time approximation scheme for feasibility analysis in static-priority systems with arbitrary relative deadlines*, in ECRTS '05: Proceedings of the 17th Euromicro Conference on Real-Time Systems (ECRTS'05), Washington, DC, USA, 2005, IEEE Computer Society, pp. 117–126.
- [16] J. C. LAGARIAS, *The computational complexity of simultaneous Diophantine approximation problems*, SIAM Journal on Computing, 14 (1985), pp. 196–209.
- [17] J. LEUNG, *Handbook of Scheduling: Algorithms, Models, and Performance Analysis*, CRC Press, Inc., Boca Raton, FL, USA, 2004.
- [18] J. Y.-T. LEUNG AND M. L. MERRILL, *A note on preemptive scheduling of periodic, real-time tasks*, Information Processing Letters, 11 (1980), pp. 115–118.
- [19] C. L. LIU AND J. W. LAYLAND, *Scheduling algorithms for multiprogramming in a hard-real-time environment*, Journal of the Association for Computing Machinery, 20 (1973), pp. 46–61.
- [20] I. NIVEN, H. S. ZUCKERMAN, AND H. L. MONTGOMERY, *An introduction to the theory of numbers*, John Wiley & Sons Inc., New York, fifth ed., 1991.
- [21] R. PELLIZZONI AND G. LIPARI, *A new sufficient feasibility test for asynchronous real-time periodic task sets*, in ECRTS, IEEE Computer Society, 2004, pp. 204–211.
- [22] C. RÖSSNER AND J. P. SEIFERT, *Approximating good simultaneous Diophantine approximations is almost NP-hard*, in Mathematical foundations of computer science 1996 (Cracow), vol. 1113 of Lecture Notes in Comput. Sci., Springer, Berlin, 1996, pp. 494–505.
- [23] V. V. VAZIRANI, *Approximation algorithms*, Springer-Verlag, Berlin, 2001.
- [24] I. WEGENER, *Complexity theory*, Springer-Verlag, Berlin, 2005. Exploring the limits of efficient algorithms, Translated from the German by Randall Pruim.